

## Mineral ATF oil


This is an oil with a high viscosity index for automatic transmissions. It is characterized by a high chemical stability, increased anti-wear properties and an excellent resistance against ageing.

## Applications:

It can be used in automatic transmissions, torque convertors, power steering and hydraulic circuits, for which the manufacturers prescribe a product, which meets the General Motors ATF TYPE Dexron II-D requirements.

## Performance Level

ALLISON : C4  
 CATERPILLAR: TO-2  
 FORD: M2C-138CJ, Mercon  
 GM: 6137-M DEXRON II-D  
 MAN: 339 V1/Z1  
 MB: 236.5  
 MB: 236.7  
 MB: 236.1  
 VOITH: H55.6335xx  
 ZF: TE-ML 03D  
 ZF: TE-ML 04D  
 ZF: TE-ML 09  
 ZF: TE-ML 11A  
 ZF: TE-ML 14A  
 ZF: TE-ML 17C

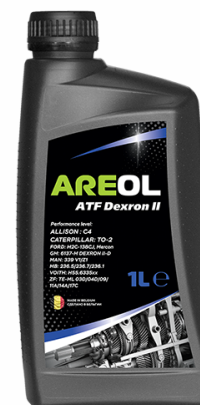

## Features

Anti-wear protection : extended transmission life.  
 Extended oil life : optimized thermal and oxidation stability.

## Specifications:

Density at 15 °C, kg/l	0,867
Viscosity 40 °C, mm <sup>2</sup> /s	37,40
Viscosity 100 °C, mm <sup>2</sup> /s	7,46
Viscosity Index	171
Flash Point COC, °C	198
Pour Point, °C	-48
Total Base Number, mgKOH/g	2,4

The data mentioned in this product information sheet are meant to enable the reader to orient himself about the properties and possible applications of our products. Although this overview is composed with all possible carefulness on the stated date, the composer does not accept any liability for damages caused by incompleteness and/or inaccuracies in this information, especially when these are caused by obvious typing errors. The terms of delivery of the supplier apply to all product supplies. The reader is advised, specially for critical applications, to make the final product-choice in consultation with the supplier. Due to continual product research and development, the information contained herein is subject to changes without notification. You can download a recent material safety data sheet of this product on our website.