

## Synthetic ATF

This is a full synthetic lubricant based on carefully selected very high quality base oils, which meets the requirements of the General Motors Dexron VI specification. Its special composition allows it to be used in all applications, where the older Dexron II and Dexron III fluids are recommended.

## Performance Level

*Dexron VI*

*Mercon LV*

*Aisin Warner 3324 (WS)*

*Honda Acura DW-1*

*Hyundai/Kia SP-IV/SP-IV M/SP-IV RR*

*Nissan Matic S*

*Jaguar ATF 3403 M115/JLM 20238*

*JASO M315-2013 1A/1A-LV/2A*


*Mazda FZ*

*Mitsubishi SP-IV/ATF PA*

*Opel, Porsche ATF 3403-M115/Type IV*

*Subaru ATF/ATF 5AT/ATF HP*

*Toyota WS*

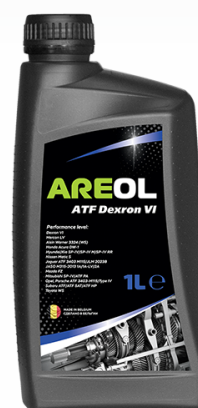

## Typicals:

Density at 15 °C, kg/l	0,847
Viscosity 40 °C, mm <sup>2</sup> /s	30,00
Viscosity 100 °C, mm <sup>2</sup> /s	6,0
Viscosity Index	151
Color	RED